

G7EB

PCB Power Relays

High Power and high temperature type Power Relay with 480 VAC 100 A current



- 480 VAC/100 A high current switching capable
- Ambient temperature 85°C
- High impulse withstand voltage, 10 kV
- Contact gap ≥ 3.6 mm (Applied to VDE0126)
- Low initial contact resistance ≥ 5 m Ω



RoHS Compliant

Model Number Legend

G7EB-□□□
1 2 3

- | | | |
|--------------------|-----------------|--------------------------------------------------|
| 1. Number of Poles | 2. Contact Form | 3. Terminal Shape |
| 1: 1-pole | A: SPST-NO (1a) | None: Standard type P1: Special terminal type |

Application Examples

- Power conditioner inverter
- Industrial inverter
- UPS

Ordering Information

| Terminal shape | Contact form | Enclosure rating | Model | Rated coil voltage (V) | Minimum packing unit |
|----------------|--------------|------------------|-----------|------------------------|----------------------|
| Standard | SPST-NO (1a) | Flux protection | G7EB-1A | 12 VDC | 60pcs/box |
| Special | | | G7EB-1AP1 | 24 VDC | |

Note. When ordering, add the rated coil voltage to the model number.

Example: G7EB-1A DC12

└─ Rated coil voltage

Both the coil voltage on the product case and the packing will be marked as □□VDC.

Ratings

● Coil

| Rated voltage | Rated current (mA) | Coil resistance (Ω) | Must operate voltage (V) | Must release voltage (V) | Max. voltage (V) | Power consumption (mW) |
|---------------|--------------------|------------------------------|--------------------------|--------------------------|------------------|--------------------------------|
| | | | % of rated voltage | | | |
| 12 VDC | Approx. 235.3 | 51 | 75% max. * | 5 to 32% | 120% (at 23°C) | Approx. 2,800 Approx. 575 * |
| 24 VDC | Approx. 116.5 | 206 | | | | |

Note 1. The rated current and resistance are measured at a coil temperature of 23°C with a tolerance of $\pm 10\%$.

Note 2. The operating characteristics are measured at a coil temperature of 23°C.

Note 3. The maximum permissible voltage is the maximum value of the fluctuation range for the relay coil operating power supply and was measured at an ambient temperature of 23°C.

* Power consumption with Holding Voltage is approx. 575 mW (when applying Holding Voltage at 45%). Please confirm the detail in page 4 ●Coil Voltage Reduction (Holding Voltage) after Relay Operation.

* Some mounting direction is out of guarantee. Please confirm the detail in page 4 ●Mounting Direction.

● Contacts

| Item | Resistive load |
|------------------------|-------------------------------------|
| Contact type | Double |
| Contact material | Ag Alloy (Cd free) |
| Rated load | 100 A at 480 VAC 40 A at 800 VAC |
| Rated carry current | 100 A |
| Max. switching voltage | AC 800 V |
| Max. switching current | 100 A |

Characteristics

| Item | Model | G7EB-1A/G7EB-1AP1 |
|---------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Contact resistance *1 | | 5 mΩ max. |
| Operate time *2 | | 30 ms max. |
| Release time *2 | | 10 ms max. |
| Insulation resistance *3 | | 1,000 MΩ min. |
| Dielectric strength | Between coil and contacts | 5,000 VAC, 50/60 Hz for 1 min |
| | Between contacts of the same polarity | 2,000 VAC, 50/60 Hz for 1 min |
| Impulse withstand voltage | | Between coil and contacts 10 kV (1.2 × 50 μs) |
| Vibration resistance | Destruction | 10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude) |
| | Malfunction | Excitation: 10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude) No excitation: 10 to 55 to 10 Hz, 1.5 mm single amplitude (0.3 mm double amplitude) |
| Shock resistance | Destruction | 1,000 m/s ² |
| | Malfunction | Excitation: 100 m/s ² No excitation: 50 m/s ² |
| Durability | Mechanical | 1,000,000 operations min. (at 10,800 operations/h) |
| | Electrical (Resistive) *4 | (1) 480 VAC 100 A 300 operations min. at 85°C (2) 800 VAC 40 A switch on, 100 A carry current, 40 A switch off; 30,000 operations min. at 85°C (Switching frequency: 1 second ON - 9 seconds OFF) |
| Failure rate (P level) (Reference value) *5 | | 1 A at 5 VDC |
| Use conditions | Coil holding voltage *6 | 45% to 65% of rated coil voltage |
| | Ambient operating temperature | -40°C to 85°C (with no icing or condensation) |
| | Ambient operating humidity | 5% to 85% |
| Weight | | Approx. 100 g |

Note. The values given above are initial values at 23°C. (Except Electrical Durability)

*1. Measurement conditions: 6 VDC, 20 A, voltage drop method.

*2. Measurement conditions: Applied rated coil voltage, no contact bouncing.

*3. Measurement conditions: Measured with a 1,000 VDC megohmmeter at the same points as the dielectric strength was measured.


*4. This specification is when diode and zener diode are used. For relay coil, please connect diode and zener diode.

For the detail, please refer to ●Diode Connection for Operating Coil on page 4.

*5. The value was measured at a switching frequency of 180 operations/ minute.

*6. For the detail of holding voltage usage, please refer to ●Coil Voltage Reduction (Holding Voltage) after Relay Operation on page 4.

Malfunction shock resistance

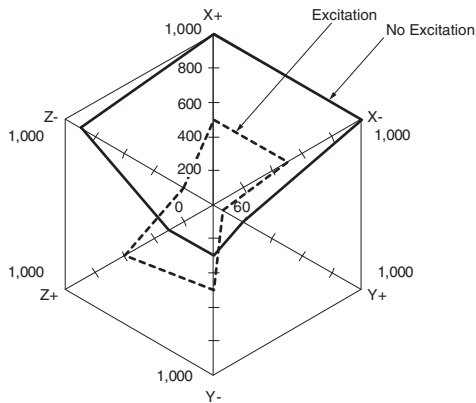

Measurement:


Measure the value of contact malfunction happening with applying 3 axes 6 direction 3 times each.

Standard value:

Excitation 100 m/s²

No excitation 50 m/s²

Shock direction



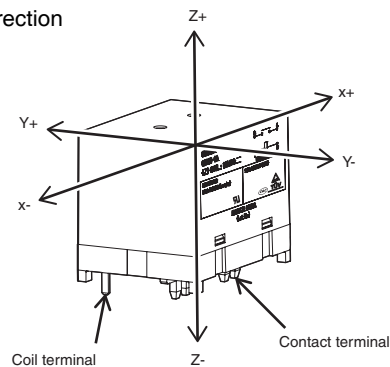


Dimensions




CAD Data Please visit our website, which is noted on the last page.

(Unit:mm)

Standard type G7EB-1A

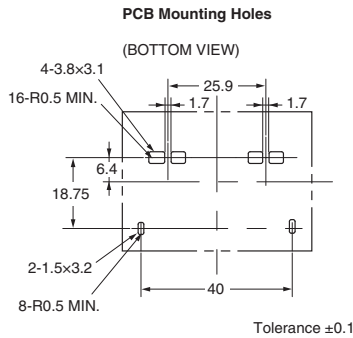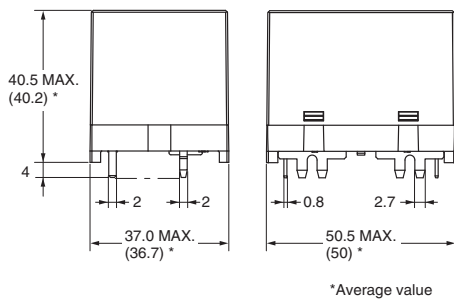

Special terminal type G7EB-1AP1

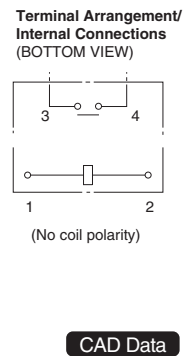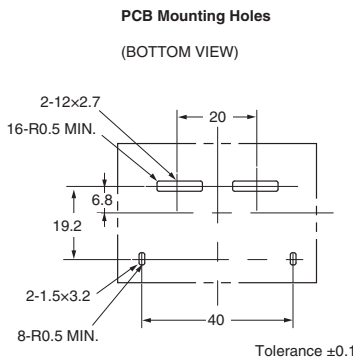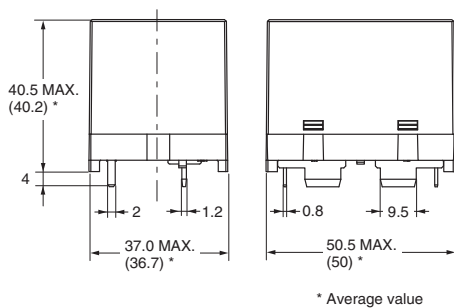

Approval Standard

UL Recognized:  (File No. E41515)

| Model | Contact form | Coil ratings | Contact ratings | Number of test operations |
|----------------------|--------------|--------------|-------------------------------------------------------------|---------------------------|
| G7EB-1A G7EB-1AP1 | SPST-NO(1a) | 12, 24 VDC | 800 VAC, 100 A carry current, 55 A switching off at 85°C | 6,000 |

EN/IEC, TÜV Certified:  (Certificate No. R50416743)

| Model | Contact form | Coil ratings | Contact ratings | Number of test operations |
|----------------------|--------------|--------------|----------------------------|---------------------------|
| G7EB-1A G7EB-1AP1 | SPST-NO(1a) | 12, 24 VDC | 800 VAC, 100 A (Resistive) | 200 |

CQC Certified:  (Certificate No. CQC18002207225)

| Model | Contact form | Coil ratings | Contact ratings | Number of test operations |
|----------------------|--------------|--------------|----------------------------|---------------------------|
| G7EB-1A G7EB-1AP1 | SPST-NO(1a) | 12, 24 VDC | 800 VAC, 100 A (Resistive) | 200 |

Precautions

● Please refer to "PCB Relays Common Precautions" for correct use.


Correct Use

● Mounting Direction

• This relay has limitation for mounting direction due to the specification of Operate voltage and Electrical durability.


Do not use in any other direction except as indicated in below chart.

There is a risk of reduced operational lifetime for failure to observe this warning.

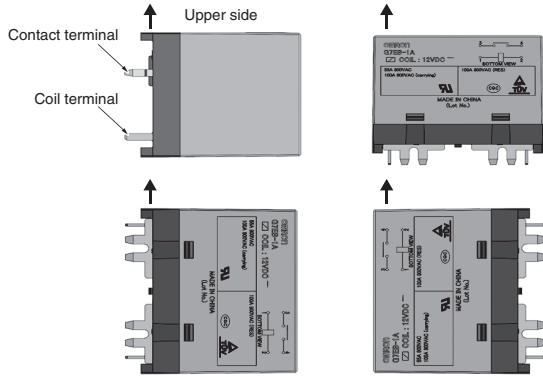

● Coil Voltage Reduction (Holding Voltage) after Relay Operation

- Use this relay with coil voltage reduction.
- Apply the rated voltage for 0.1 to 3 seconds to the coil first.
- The range of coil rated voltage must be set as 100 to 120%, holding voltage must be 45 to 65%. Do not exceed the ranges due to the change of coil voltage change and so on.

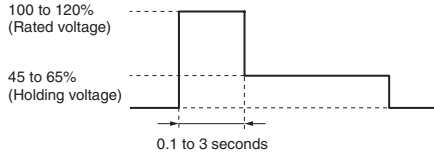

| | Applied coil voltage | Coil resistance * | Coil power consumption |
|-----------------|----------------------|-------------------|------------------------|
| Rated voltage | 100 to 120% | 51 Ω | Approx. 2.8 to 4.0 mW |
| Holding voltage | 45 to 65% | | Approx. 0.57 to 1.2 mW |


* The coil resistances were measured at a coil temperature of 23°C with tolerances of ± 10%.

● Diode Connection for Operating Coil

- Connect diode or Zener diode (or Varistor) to the coil. (refer to the picture below).

Diode is for coil surge absorption. Ensure to include Zener diode as there is a possibility of any influence for switching capability when only using diodes.

- Coils have polarity, so put diodes as it becomes reserve direction with applied voltage for coils.
- The recommended Zener diode voltage is 3 times that of the rated coil voltage.
- Use diodes whose reverse dielectric strength are 10 times or more that of coil rated voltage, and with forward current more than coil rated current.



● PCB Terminal soldering

- Solder at 290°C for 20 seconds (max.) in soldering bath.
- It is not possible to wash relay as this is not fully sealed type.

● Assembly

- To reduce the risk of specification deterioration assemble relays in a dust free, low humidity and non-corrosive gas environment.
- Take care when mounting relays to utilize adequate anchorage on both sides of PCB to optimize heat transfer and reduce risk for both heat and mechanical stress.
- This product weight is about 100 g. Be careful of the strength of PCB. And to reduce the happening of soldering crack due to heat stress, use both sides through hole PCB.

● Drop

- Do not use relays in the event of any droppage.

● Electrical Endurance

- As this relay is an AC high voltage type, there are increased risks of abnormal heat generation or fire if you use in a application inconsistent with published specification. Use only for AC load and within specified rating.
- This relay's electrical endurance specification is based on our company standard test procedure with resistive loads. Relays intended for use with different; types of drive circuits PWM, capacitive, resistive dropper etc.), types of loads (e.g. capacitive or inductive), and switching cycles (duty and operation timing) must be tested to confirm suitability to actual intended application.

● Micro load

- This is a power relay for AC high voltage switching. Do not use for micro loads such as signal switching.

Please check each region's Terms & Conditions by region website.

OMRON Corporation

Electronic and Mechanical Components Company

Regional Contact

Americas

<https://www.components.omron.com/>

Asia-Pacific

<https://ecb.omron.com.sg/>

Korea

<https://www.omron-ecb.co.kr/>

Europe

<http://components.omron.eu/>

China

<https://www.ecb.omron.com.cn/>

Japan

<https://www.omron.co.jp/ecb/>